




**BROADCAST  
RESINOUS GRANITE  
DECORATIVE  
EPOXY FLOOR**





Abolin's **Decorative SL Deco Flooring System** (Granite Flooring System) is a combination of beauty and strength that is engineered to keep your floor looking and performing well for years to come. This 100% solids epoxy floor coating can be used with a variety of graded Granite, marble or ceramic fillers. Our graded fillers provide stunning aesthetic qualities, as well as, anti-slip properties, high impact and abrasion resistance. Abolin's decorative Granite flooring can be finished with a wide selection of gloss or satin top coats. Custom blends and other flooring options are available to help you create a uniquely beautiful floor.

Abolin's resinous Deco Granite flooring is beautiful and ultra-tough. It has been engineered for use in industrial applications, commercial properties, and other facilities where a decorative floor surface is needed and high-performance characteristics are required. It can be installed at different thicknesses for various amounts of impact resistance and can be top-coated with a variety of finish coats, produced by Abolin, to provide chemical resistance, anti-stain properties etc.

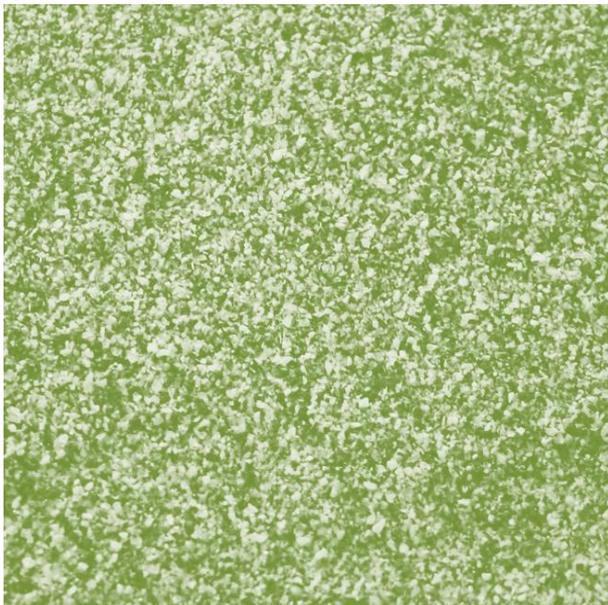

Installed using broadcast, slurry, or trowel methods, Abolin's decorative, epoxy granite flooring is extremely versatile. A trowel application adds to the abrasion and impact resistance of the flooring and also looks slightly better, though this will add cost to the project.

Where cost is an issue, broadcasting may be the preferred application method. When it comes to decorative epoxy granite flooring Abolin can't be outshined. Contact an Abolin representative to learn more about Self-Leveling Deco and for guidance on putting together a flooring system that meets your project requirements.

# COLOUR CHART GRANITES

YELLOW



GREY



GREEN



ORANGE



RED



BLACK



WHITE



# APPLICATION TIPS

## Broadcast

**Important Note:** Cool Barrier SLV Deco is supplied in standard premixed components suitable for trowel method application. In this brochure we are presenting the application of Cool Barrier SLV Deco as a Broadcast system, using epoxy materials from the Cool Barrier SLV Floor range of product.

**Resinous flooring system: Cool Barrier SLV Deco Broadcast System** is a seamless, aesthetic, broadcast and sealed epoxy floor, composed of multicolored granite aggregates finished with transparent top coats applied between 1.5 – 2 mm thick. System to consist of the following components:

## Cool Barrier SL Deco Broadcast

### PROPOSED BUILD UP

#### Interior

1. Primer: Cool Barrier SLV SEALER: applied between 8 – 10 mils, broadcast quartz sand as bridge between the subsequent coatings. When dry broom and vacuum
2. 1st Body Coat: Cool Barrier SLV SEALER applied at 16 mils. / Broadcast Decorative Granite (or coloured quartz) to Rejection
3. 2nd Body Coat: Body Coat: Cool Barrier SLV SEALER applied at 16 mils / Broadcast Decorative Granite to Rejection.
4. Top Coat: SLV FLOOR SEALER applied at 16 mils

#### Exterior

1. Primer: Cool Barrier SLV SEALER: applied between 8 – 10 mils.
2. 1st Body Coat: Cool Barrier SLV SEALER / Broadcast Decorative Granite to Rejection applied at 16 mils.
3. 2nd Body Coat: Body Coat: Cool Barrier SLV SEALER / Broadcast Decorative Granite to Rejection applied at 16 mils.
4. Top Coat: Cool Barrier SLV FLOOR SEALER DIAMOND TYPE.





[www.abolinco.com](http://www.abolinco.com)